


Technical information

For Liniar composite doors



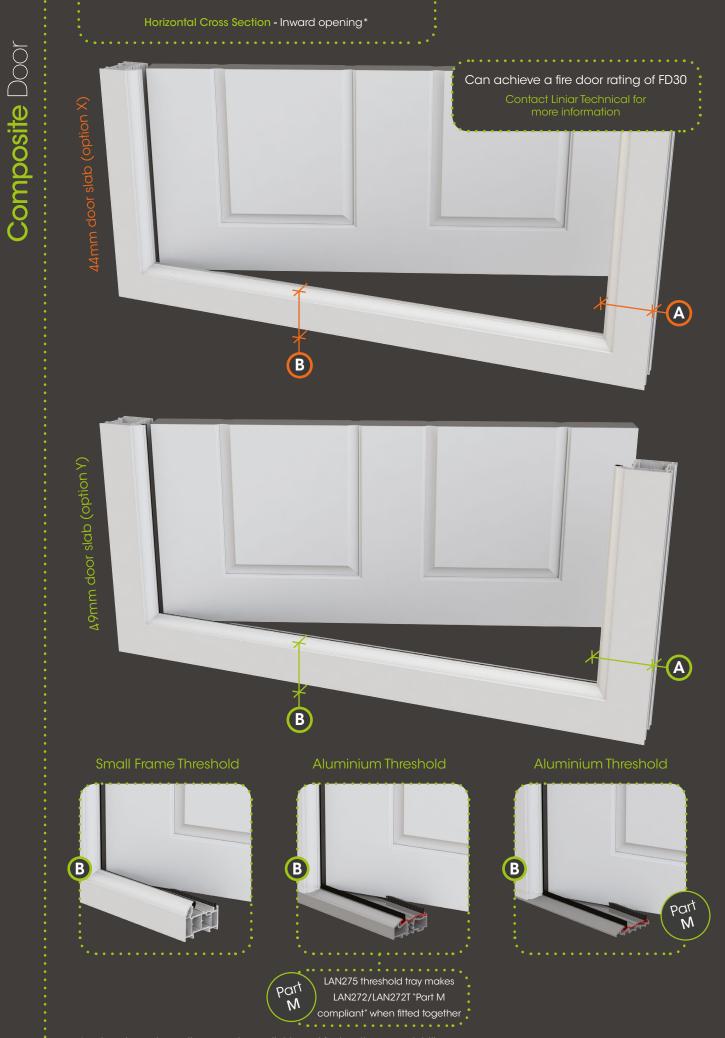

* outward opening options are also available and feature the same sightlines


Composite Door

- Sculptured and Chamfered suite
- Wide variety of 44mm and 49mm door slabs
- Part M compliant low threshold options
- Capable of PAS24 (specific door slab required)
- Patented co-ex gasket

Accreditations



Colour Options





44mm - Option X


Product	Dim. 🛕
Composite frame LSW018	67mm


Product	Dim. B
Composite frame LSW018	67mm
Proprietary thresholds available. Contact your preferred supplier	


49mm - Option Y


Product	Dim. 🛕
Small frame L#W011 or L#W012	57mm
Large frame L#W016 or L#W017	77mm

Product	Dim. B
Small frame L#W011 & L#W012	57mm
Large frame L#W01 & L#W017	77mm
Aluminium threshold LAN272 or LAN272T	30mm
Part M threshold LAN271	15mm

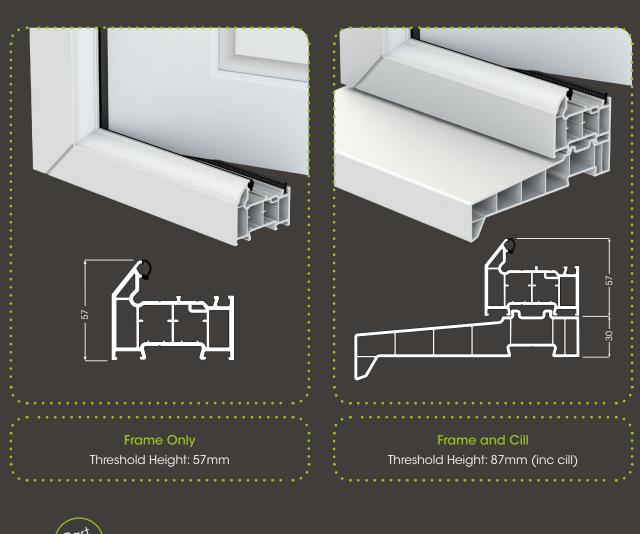

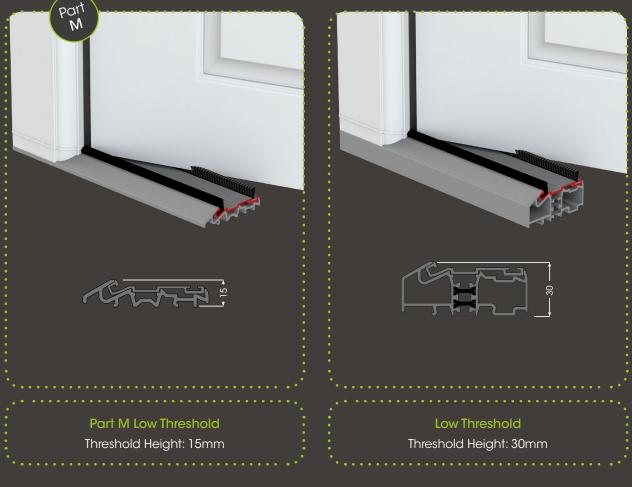

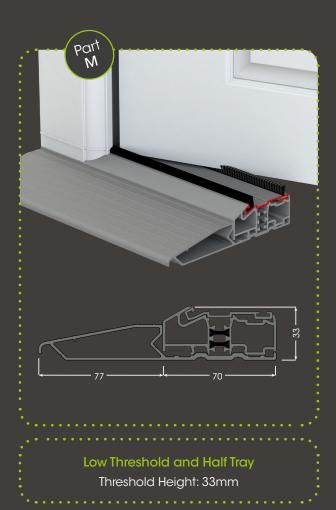

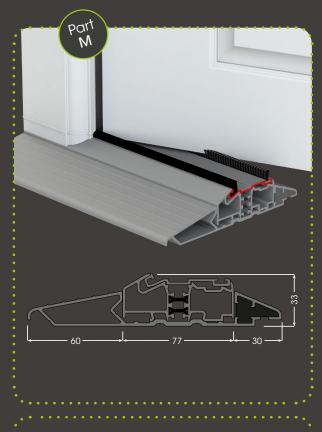

Low Threshold and Full Tray Threshold Height: 33mm



Liniar specification guide

The Liniar Specification Guide is an A4-size, 234-page, full colour guide to specifying energy efficient PVCu windows and doors.

Covering the full range of lead-free Liniar products including composite doors, the Specification Guide includes full product charts, U-values, dimensions, accreditations, safety information and a variety of case studies.

To view an online copy of the Liniar Specification Guide and to order your free copy visit :

www.liniar.co.uk/specification-guide

Liniar

Flamstead House Denby Hall Business Park Denby Derbyshire DE5 8JX Tel: +44 (0)1332 883900 Fax: +44 (0)1332 883901 Email: sales@liniar.co.uk

www.liniar.co.uk

